

# Magnet

Better. By design



Range and Frontal Specification	
Range Name:	Ascoli
Style:	Matt Slab / Horizontal Grain
Door Specification:	18mm MFC on a chipboard core with colour-matched reverse. Matching 1.3mm ABS edged all-round.
Reverse:	Colour Matched Melamine
Glazed Frontals:	Not available

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Not available
Plinth:	18mm thick MFC, 2.7m long
End Panels:	18mm thick MFC /vertical grain
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



# Ascoli

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack


Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design

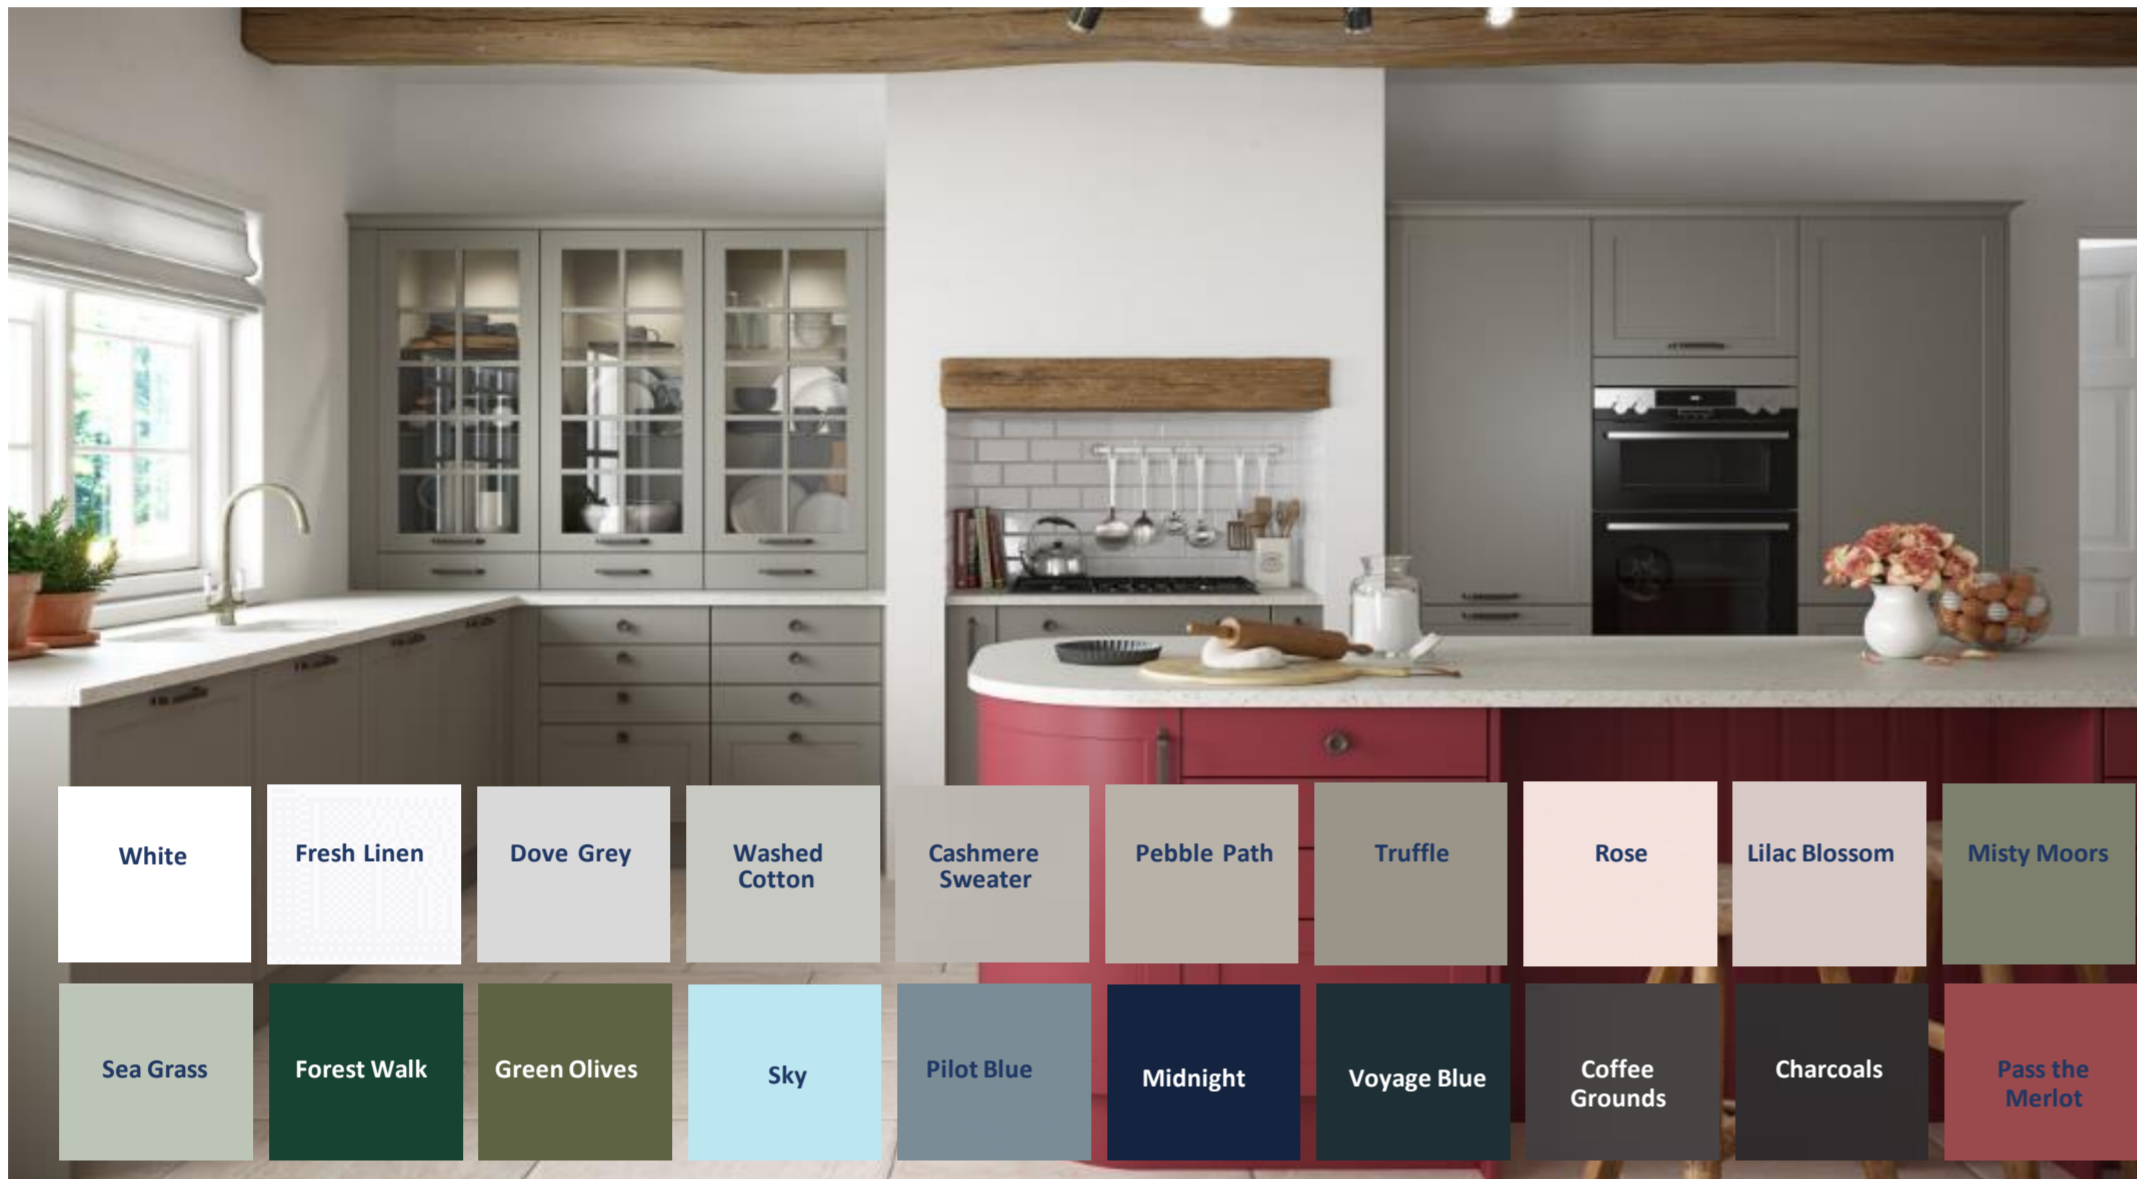

### Range and Frontal Specification

<b>Range Name:</b>	Dunham
<b>Style:</b>	Painted Shaker
<b>Door Specification:</b>	19mm one piece Painted Shaker style on MDF core and colour-matched reverse.
<b>Reverse:</b>	Colour Matched Melamine
<b>Glazed Frontals:</b>	Clear, toughened, 4mm thick, PVC beading 1052 x 496 - 10 panes, 896 x 496 - 8 panes, 700 x 496 - 6 panes

### Plinth, Trim and Panel Specification

<b>Cornice/Pelmet:</b>	Foil Wrapped MDF Painted, 2.7m long
<b>Plinth:</b>	16mm painted MDF, 2.7m long
<b>End Panels:</b>	18.5mm thick Painted MDF, reversible T&G/Smooth
<b>Curved Trim:</b>	Foil Wrapped Painted. For use with WEC35
<b>Curved Plinth:</b>	Foil Wrapped Painted. For use with FEC35

As a premium painted product it is vitally important that you follow the simple After Care instructions provided separately to ensure longevity and enjoyment of your kitchen

<b>Certification:</b>	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
-----------------------	--



FM535144



# Dunham

Wall Unit Specification:	
<b>Unit Depth:</b>	330mm (excluding frontal)
<b>Internal Depth:</b>	309mm
<b>Height:</b>	704 (Standard), 896mm (Tall)
<b>Shelf Qty:</b>	2 Shelves

Floor/Tall Unit Specification:	
<b>Unit Depth:</b>	565mm (excluding frontal)
<b>Internal Depth:</b>	505mm
<b>Service Void:</b>	57mm
<b>Base Unit Height to Worktop:</b>	870mm
<b>Tall Unit Height:</b>	2118mm (Standard) 2310 (Tall)
<b>Legs:</b>	Adjustable legs supplied with all base/tall units
<b>Plinth:</b>	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
<b>Carcase Options:</b>	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
<b>Hinge Options:</b>	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
<b>Drawerbox Options:</b>	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
<b>Back Panel:</b>	3mm High Density Fibre Board (HDF)
<b>Flatpack Units:</b>	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
<b>Carcase Options:</b>	Grey 18mm thick chipboard cabinet, 18mm thick shelf
<b>Hinge Options:</b>	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
<b>Drawerbox Options:</b>	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
<b>Back Panel:</b>	6mm High Density Fibre Board (HDF)
<b>Flatpack Units:</b>	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble (Midnight, White, Sky and Dove Grey Only)	
<b>Carcase Options:</b>	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
<b>Hinge Options:</b>	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
<b>Drawerbox Options:</b>	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
<b>Back Panel:</b>	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



Available in:

Blue

## Range and Frontal Specification

Range Name:	Fusion
Style:	Gloss Slab
Door Specification:	18mm Ultra High Gloss over lacquered slab MFC on a chipboard core with matt colour-matched reverse. 1.3mm 'Two in One' edged all-round (Colour-matched + Stainless Steel look)
Reverse:	Melamine
Glazed Frontals:	Not available

## Plinth, Trim and Panel Specification

Cornice/Pelmet:	Not available
Plinth:	18mm thick Ultra High Gloss over Lacquered MFC, 2.7m long
End Panels:	25mm thick Ultra High Gloss over Lacquered MFC with Colour Matched Edging
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen: Please follow the After Care guidelines provided separately.

Certification: Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H'  
Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



FM535144



# Fusion

## Wall Unit Specification:

Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

## Floor/Tall Unit Specification:

Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

## Rigid Factory Assembled

Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

## Rigid iD<sup>3</sup> Cabinet

Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

## Ready to Assemble

Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



Available in:

Super Matt  
Metallic  
Midnight

Gloss  
White

Super Matt

## Range and Frontal Specification

<b>Range Name:</b>	Hoxton
<b>Style:</b>	Premium Slab
<b>Door Specification:</b>	18.5mm Foil Laminated MDF edged with 1mm ABS
<b>Reverse:</b>	Melamine
<b>Glazed Frontals:</b>	Not available (Vitrine Black Wave shown in image)

## Plinth, Trim and Panel Specification

<b>Cornice/Pelmet:</b>	Foil Wrapped MDF 2.7m long
<b>Plinth:</b>	16mm thick foil wrapped MDF, 2.7m long
<b>End Panels:</b>	18.5mm Foil Laminated MDF edged with 1mm ABS
<b>Curved Trim:</b>	Not available
<b>Curved Plinth:</b>	Not available

**Caring for your kitchen:** Please follow the After Care guidelines provided separately.

**Certification:** Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H'  
Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



FM535144



# Hoxton

Wall Unit Specification:	
<b>Unit Depth:</b>	330mm (excluding frontal)
<b>Internal Depth:</b>	309mm
<b>Height:</b>	704 (Standard), 896mm (Tall)
<b>Shelf Qty:</b>	2 Shelves

Floor/Tall Unit Specification:	
<b>Unit Depth:</b>	565mm (excluding frontal)
<b>Internal Depth:</b>	505mm
<b>Service Void:</b>	57mm
<b>Base Unit Height to Worktop:</b>	870mm
<b>Tall Unit Height:</b>	2118mm (Standard) 2310 (Tall)
<b>Legs:</b>	Adjustable legs supplied with all base/tall units
<b>Plinth:</b>	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
<b>Carcase Options:</b>	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
<b>Hinge Options:</b>	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
<b>Drawerbox Options:</b>	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
<b>Back Panel:</b>	3mm High Density Fibre Board (HDF)
<b>Flatpack Units:</b>	For transport reasons, the L-shaped corner unit is supplied flatpack


Rigid iD <sup>3</sup> Cabinet	
<b>Carcase Options:</b>	Grey 18mm thick chipboard cabinet, 18mm thick shelf
<b>Hinge Options:</b>	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
<b>Drawerbox Options:</b>	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
<b>Back Panel:</b>	6mm High Density Fibre Board (HDF)
<b>Flatpack Units:</b>	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
<b>Carcase Options:</b>	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
<b>Hinge Options:</b>	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
<b>Drawerbox Options:</b>	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
<b>Back Panel:</b>	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design

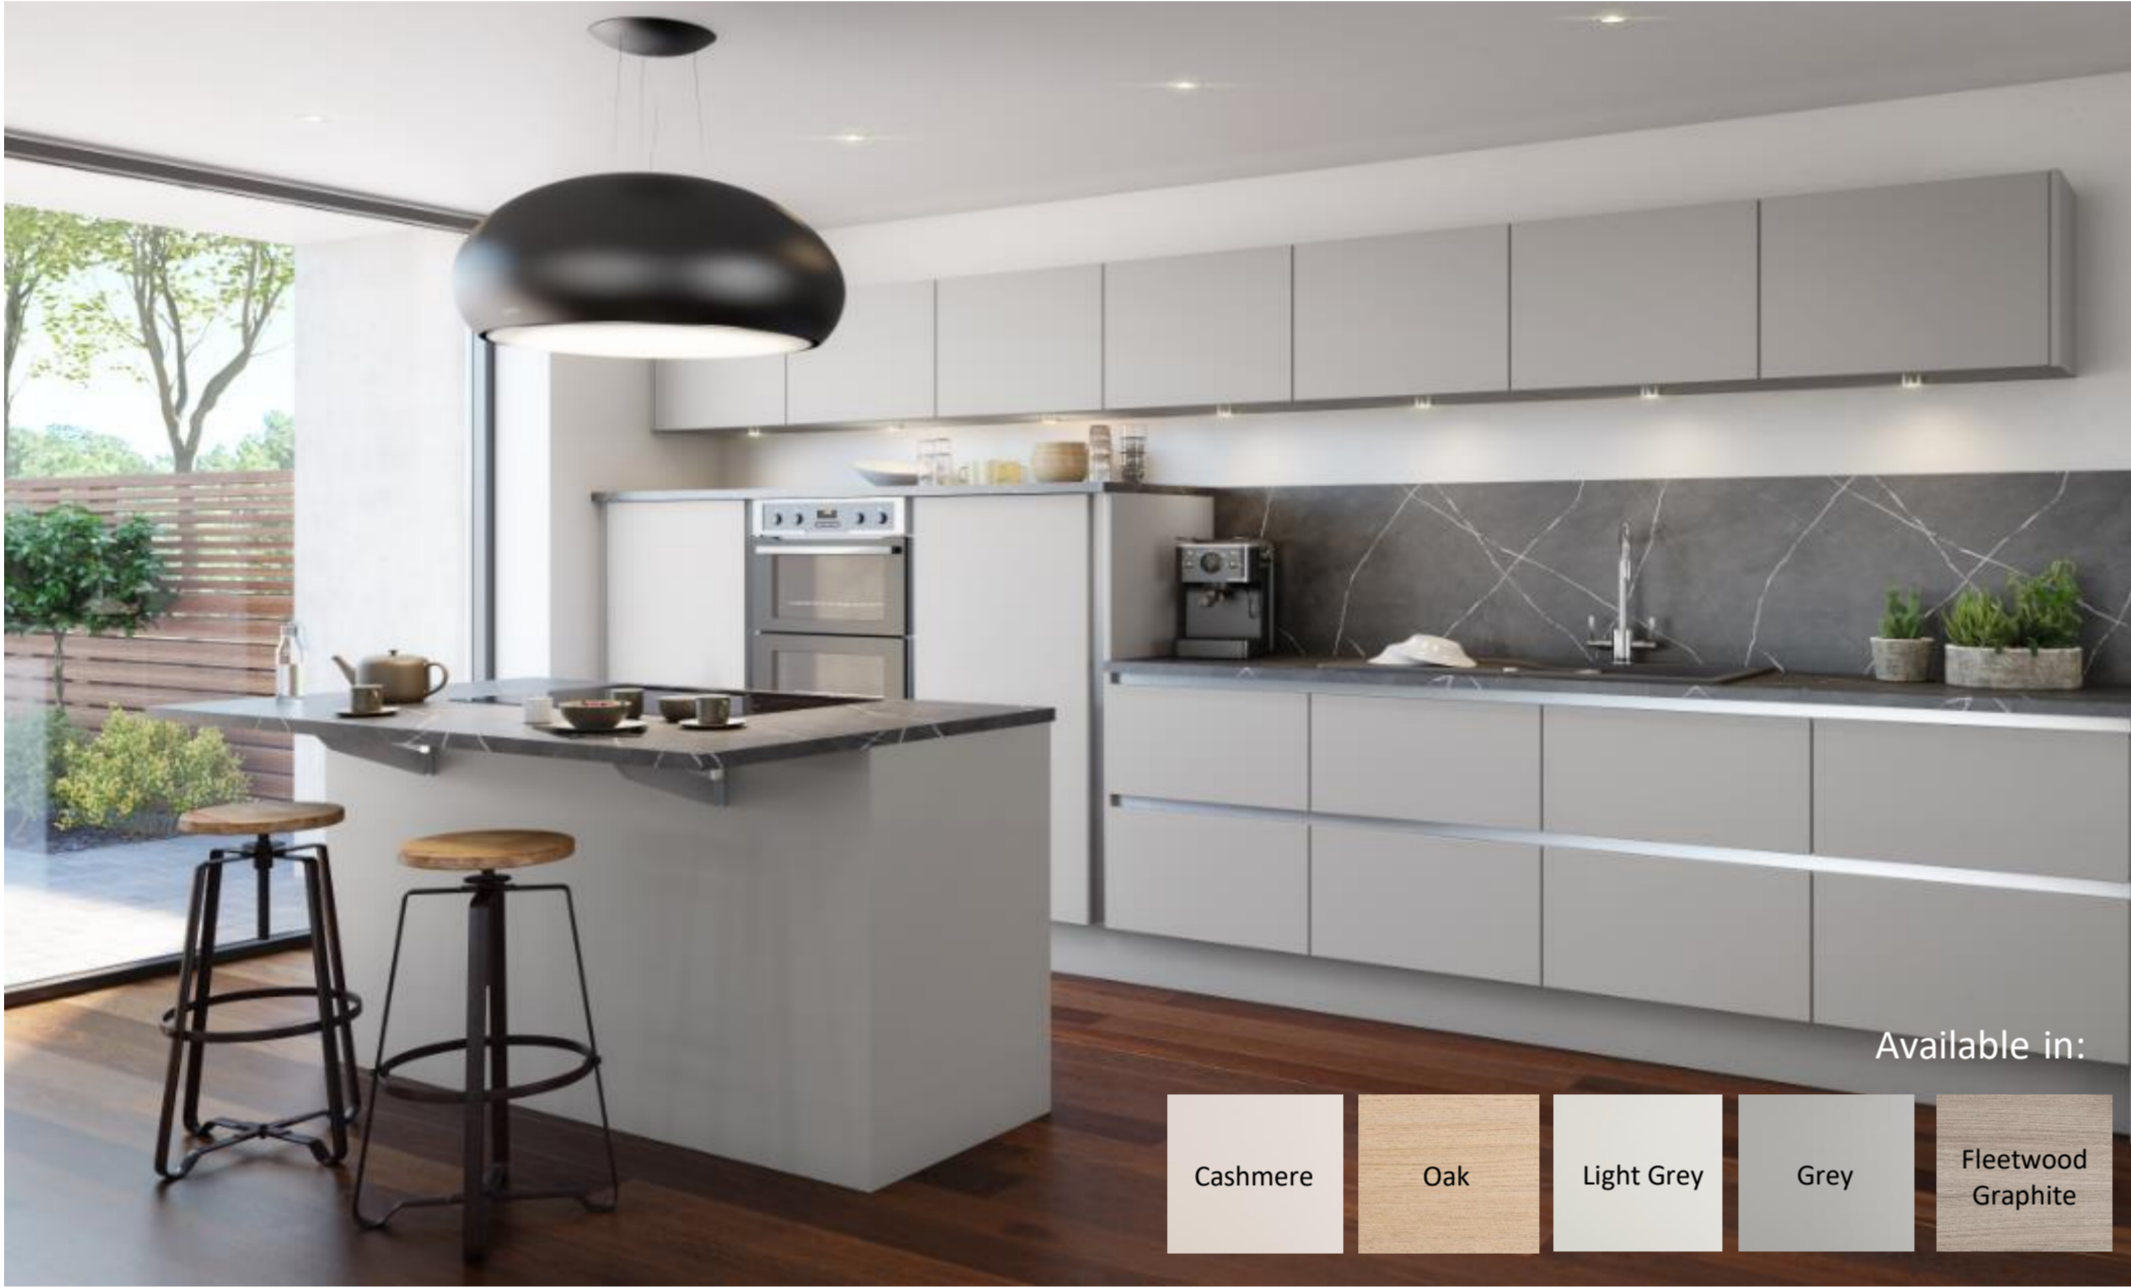

Range and Frontal Specification	
Range Name:	Integra Ascoli
Style:	Matt Slab / Horizontal Grain
Door Specification:	18mm MFC on a chipboard core with colour-matched reverse. Matching 1.3mm ABS edged all-round.
Reverse:	Colour Matched Melamine
Glazed Frontals:	Not available

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Not available
Plinth:	18mm thick MFC, 2.7m long
End Panels:	18mm thick MFC /vertical grain
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
--------------------------	--

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



## Integra Ascoli

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704mm
Shelf Qty:	2 Shelves
Trim Colour:	Aluminium

Floor/Tall Unit Specification:	
Unit Depth:	565mm
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	902mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Trim Colour:	Choice of Aluminium, Brass, Black or Gunmetal

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Integra Dunham



White	Fresh Linen	Dove Grey	Washed Cotton	Cashmere Sweater	Pebble Path	Truffle	Rose	Lilac Blossom	Misty Moors
Sea Grass	Forest Walk	Green Olives	Sky	Pilot Blue	Midnight	Voyage Blue	Coffee Grounds	Charcoals	Pass the Merlot

## Range and Frontal Specification

Range Name:	Integra Dunham
Style:	Painted Shaker
Door Specification:	19mm one piece Painted Shaker style on MDF core and colour-matched reverse.
Reverse:	Colour Matched Melamine
Glazed Frontals:	Not available

## Plinth, Trim and Panel Specification

Cornice/Pelmet:	Foil Wrapped MDF Painted, 2.7m long
Plinth:	16mm Light Grey MDF, 2.7m long
End Panels:	18.5mm thick Painted MDF, reversible T&G/Smooth
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen: Please follow the After Care guidelines provided separately.

Certification: Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H'  
Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704mm
Shelf Qty:	2 Shelves
Trim Colour:	Aluminium

Floor/Tall Unit Specification:	
Unit Depth:	565mm
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	902mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Trim Colour:	Choice of Aluminium, Brass, Black or Gunmetal

## Rigid Factory Assembled

Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

## Rigid iD<sup>3</sup> Cabinet

Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



## Range and Frontal Specification

<b>Range Name:</b>	Integra Fusion
<b>Style:</b>	Gloss Slab 18mm Ultra High Gloss over lacquered slab MFC on a Chipboard core with Matt colour-matched reverse. 1.3mm 'Two in One' edged all-round (Colour-matched + Stainless Steel look)
<b>Door Specification:</b>	
<b>Reverse:</b>	Melamine
<b>Glazed Frontals:</b>	Not available

## Plinth, Trim and Panel Specification

<b>Cornice/Pelmet:</b>	Not available
<b>Plinth:</b>	18mm thick Ultra High Gloss over Lacquered MFC, 2.7m long
<b>End Panels:</b>	25mm thick Ultra High Gloss over Lacquered MFC with Colour Matched Edging.
<b>Curved Trim:</b>	Not available
<b>Curved Plinth:</b>	Not available

<b>Caring for your kitchen:</b>	Please follow the After Care guidelines provided separately.
---------------------------------	--

<b>Certification:</b>	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
-----------------------	--



# Integra Fusion

Wall Unit Specification:	
<b>Unit Depth:</b>	330mm (excluding frontal)
<b>Internal Depth:</b>	309mm
<b>Height:</b>	704mm
<b>Shelf Qty:</b>	2 Shelves
<b>Trim Colour:</b>	Aluminium

Floor/Tall Unit Specification:	
<b>Unit Depth:</b>	565mm
<b>Internal Depth:</b>	505mm
<b>Service Void:</b>	57mm
<b>Base Unit Height to Worktop:</b>	902mm
<b>Tall Unit Height:</b>	2118mm (Standard) 2310 (Tall)
<b>Legs:</b>	Adjustable legs supplied with all base/tall units
<b>Plinth:</b>	Continuous 'clip-on' plinth, 166mm high
<b>Trim Colour:</b>	Choice of Aluminium, Brass, Black or Gunmetal

Rigid Factory Assembled	
<b>Carcase Options:</b>	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
<b>Hinge Options:</b>	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
<b>Drawerbox Options:</b>	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base 3mm High Density Fibre Board (HDF)
<b>Back Panel:</b>	
<b>Flatpack Units:</b>	For transport reasons, the L-shaped corner unit is supplied flatpack


Rigid iD <sup>3</sup> Cabinet	
<b>Carcase Options:</b>	Grey 18mm thick chipboard cabinet, 18mm thick shelf
<b>Hinge Options:</b>	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
<b>Drawerbox Options:</b>	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
<b>Back Panel:</b>	6mm High Density Fibre Board (HDF)
<b>Flatpack Units:</b>	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

Magnet

Better. By design

Integra Hoxton

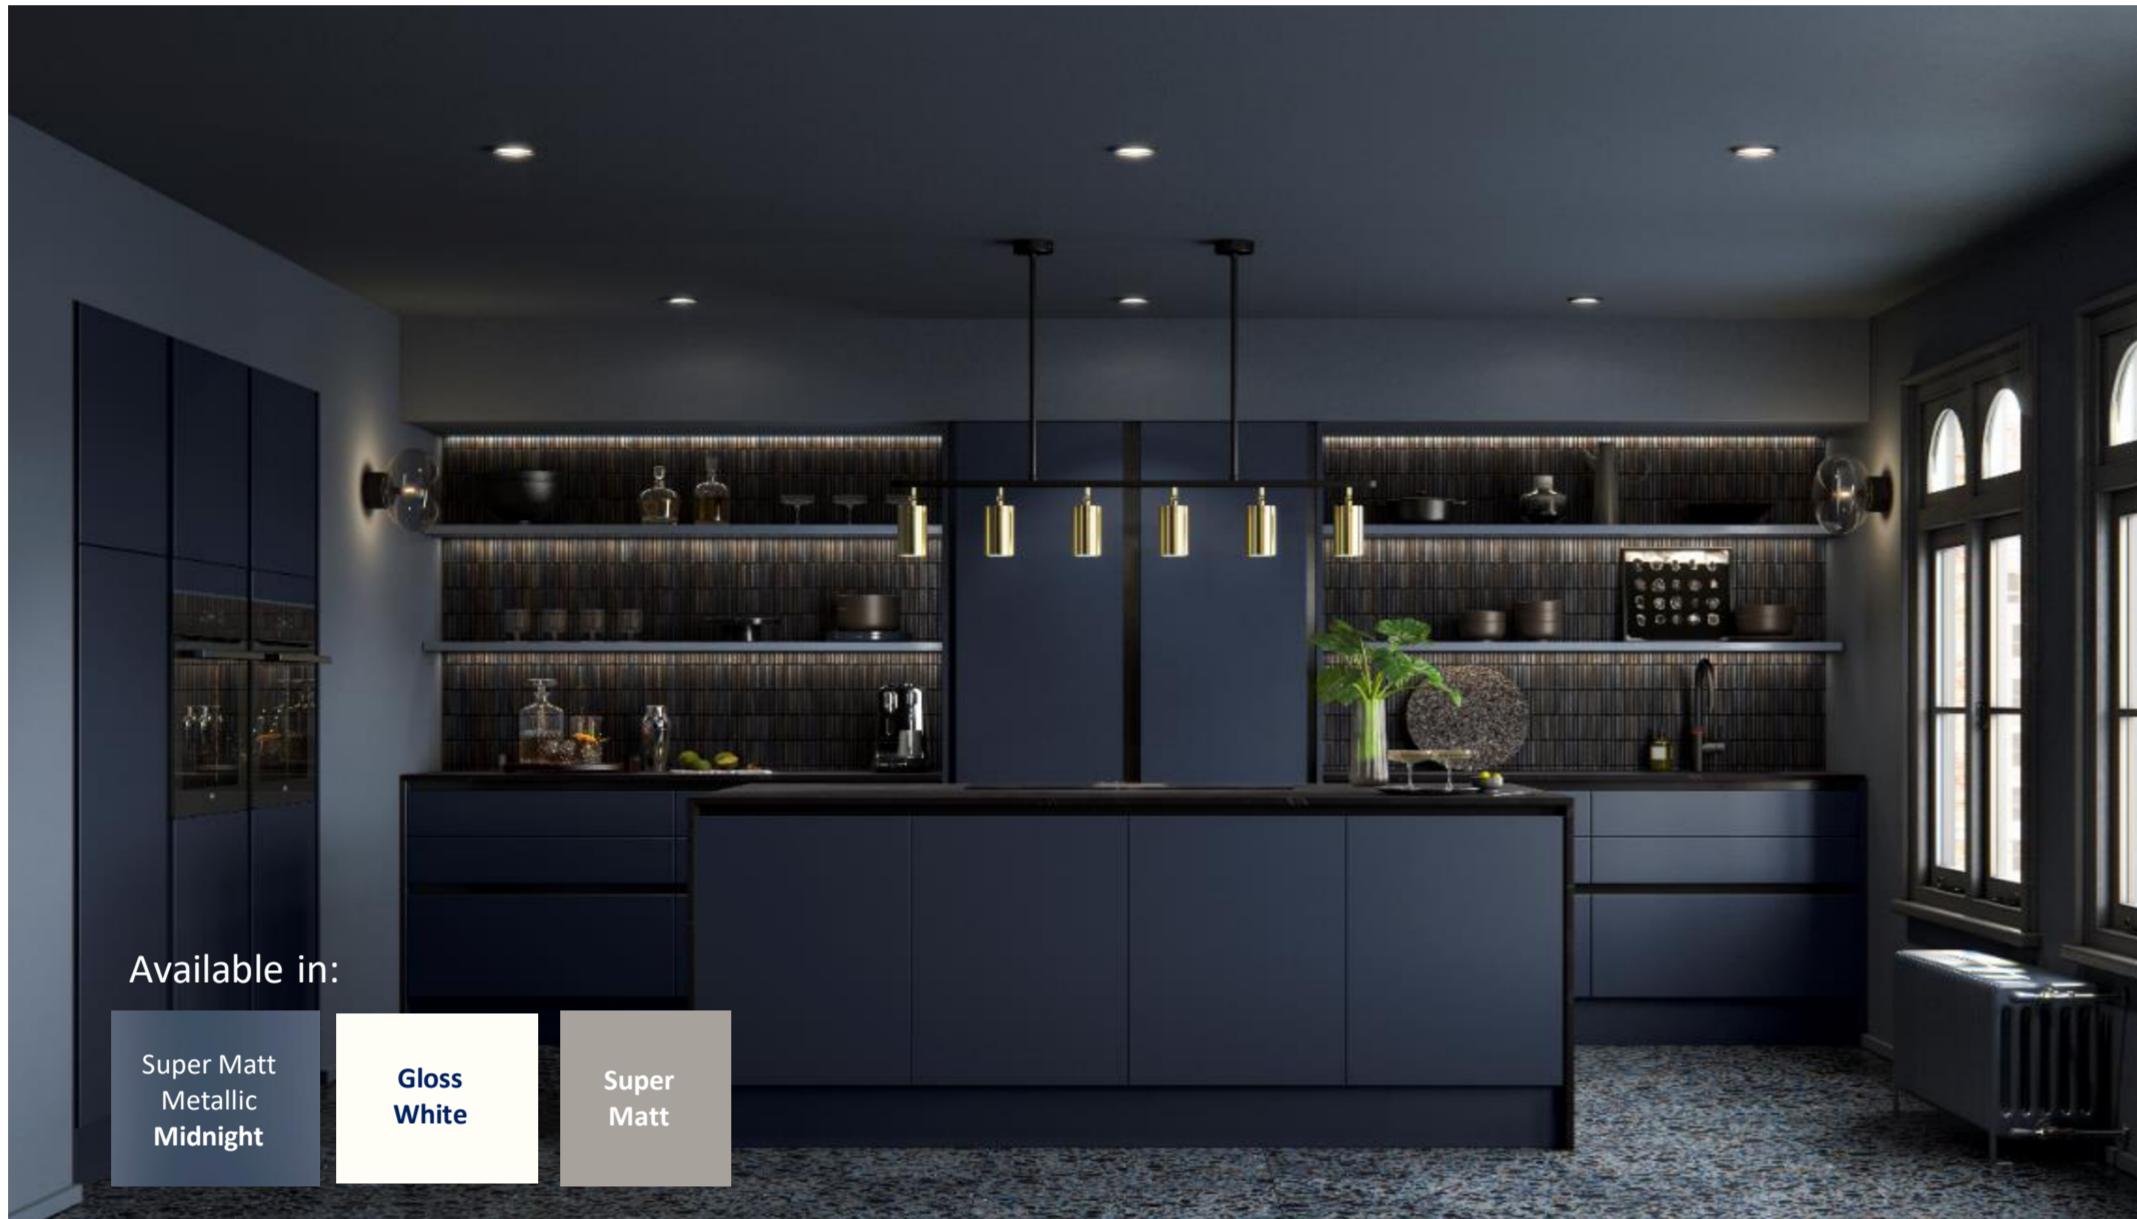

Range and Frontal Specification	
Range Name:	Hoxton
Style:	Premium Slab
Door Specification:	18.5mm Foil Laminated MDF edged with 1mm ABS
Reverse:	Melamine
Glazed Frontals:	Not available (Vitrine Black Wave shown in image)
Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Foil Wrapped MDF 2.7m long
Plinth:	16mm thick foil wrapped MDF, 2.7m long
End Panels:	18.5mm Foil Laminated MDF edged with 1mm ABS
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H'



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704mm
Shelf Qty:	2 Shelves
Trim Colour:	Aluminium

Floor/Tall Unit Specification:	
Unit Depth:	565mm
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	902mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Trim Colour:	Choice of Aluminium, Brass, Black or Gunmetal

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD³ Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD³
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Integra Ludlow



### Range and Frontal Specification

Range Name:	Integra Ludlow
Style:	Timber Painted Shaker*
Door Specification:	Five piece Shaker frontal style with, Overpainted 20mm Solid Ash Frames and 6mm Ash Veneered Centre Panels. 20mm Overpainted Solid Ash Drawer Fronts
Reverse:	Colour Matched - Painted
Glazed Frontals:	Clear, toughened, 4mm thick

### Plinth, Trim and Panel Specification

Cornice/Pelmet:	Painted Ash Veneer Wrapped MDF 49mm high, 2.7m long
Plinth:	16mm thick Colour Matched - Painted Ash Veneered chipboard on 1 face, 2.7m long
End Panels:	18mm thick Colour Matched - Painted Ash Veneered chipboard with Veneered Edge
Curved Trim:	Overpainted veneered MDF. For use with WEC35 & WTEC35
Curved Plinth:	Overpainted veneered MDF. For use with FEC35

As a premium painted product it is vitally important that you follow the simple After Care instructions provided separately to ensure longevity and enjoyment of your kitchen

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704mm
Shelf Qty:	2 Shelves
Trim Colour:	Aluminium

Floor/Tall Unit Specification:	
Unit Depth:	565mm
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	902mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Trim Colour:	Choice of Aluminium, Brass, Black or Gunmetal

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Integra Nordic Oak



### Range and Frontal Specification

Range Name:	Nordic Oak
Style:	oak veneer slab frontal
Door Specification:	18mm chipboard core with 0.5mm oak veneer. Matching 1.5mm oak veneer edging.
Reverse:	Matching 0.5mm oak veneer
Glazed Frontals:	Not available

### Plinth, Trim and Panel Specification

Cornice/Pelmet:	Oak veneer wrapped MDF 42mm high, 2.7m long
Plinth:	16mm thick oak veneer wrapped chipboard, 2.7m long
End Panels:	16mm thick oak veneer chipboard with 1.5mm oak veneer edge
Curved Trim:	Not Available
Curved Plinth:	Not Available

Caring for your kitchen: Please follow the After Care guidelines provided separately.

Certification: Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H'



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704mm
Shelf Qty:	2 Shelves
Trim Colour:	Aluminium

Floor/Tall Unit Specification:	
Unit Depth:	565mm
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	902mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Trim Colour:	Choice of Aluminium, Brass, Black or Gunmetal

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD³ Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD³
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



Range and Frontal Specification	
Range Name:	Nova
Style:	Slab
Door Specification:	16mm PET foil on flat laminated chipboard with matching 0.5mm ABS edge all round
Reverse:	Balancing colour matched reverse foil
Glazed Frontals:	Not available
Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Foil Wrapped MDF 2.7m long
Plinth:	16mm thick MFC, 2.7m long
End Panels:	16mm thick PVC Edged Chipboard, colour matched reverse
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H'



# Integra Nova

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704mm
Shelf Qty:	2 Shelves
Trim Colour:	Aluminium
Floor/Tall Unit Specification:	
Unit Depth:	565mm
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	902mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Trim Colour:	Choice of Aluminium, Brass, Black or Gunmetal
Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack
Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



Range and Frontal Specification	
Range Name:	Integra Soho
Style:	Painted Slab
Door Specification:	18.5mm Painted MDF
Reverse:	Colour Matched Melamine
Glazed Frontals:	Not available

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Foil Wrapped MDF Painted, 2.7m long
Plinth:	16mm Light Grey MDF, 2.7m long
End Panels:	18.5mm thick Painted MDF, Smooth
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
--------------------------	--

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



## Integra Soho

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704mm
Shelf Qty:	2 Shelves
Trim Colour:	Aluminium

Floor/Tall Unit Specification:	
Unit Depth:	565mm
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	902mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Trim Colour:	Choice of Aluminium, Brass, Black or Gunmetal

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



Range and Frontal Specification	
Range Name:	Ludlow
Style:	Timber Painted Shaker*
Door Specification:	Five piece Shaker frontal style with, Overpainted 20mm Solid Ash Frames and 6mm Ash Veneered Centre Panels. 20mm Overpainted Solid Ash Drawer Fronts
Reverse:	Colour Matched - Painted
Glazed Frontals:	Clear, toughened, 4mm thick

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Painted Ash Veneer Wrapped MDF 49mm high, 2.7m long
Plinth:	16mm thick Colour Matched - Painted Ash Veneered chipboard on 1 face, 2.7m long
End Panels:	18mm thick Colour Matched - Painted Ash Veneered chipboard with Veneered Edge
Curved Trim:	Overpainted veneered MDF. For use with WEC35 & WTEC35
Curved Plinth:	Overpainted veneered MDF. For use with FEC35

As a premium painted product it is vitally important that you follow the simple After Care instructions provided separately to ensure longevity and enjoyment of your kitchen

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



# Ludlow

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



## Range and Frontal Specification

Range Name:	Luna
Style:	Integral Handle
Door Specification:	19mm PET foil on MDF core with post formed Integrated J pull handle and white melamine balancing reverse. Matching 0.8mm ABS edge to vertical sides
Reverse:	White Melamine
Glazed Frontals:	Not available

## Plinth, Trim and Panel Specification

Cornice/Pelmet:	Foil Wrapped MDF 2.7m long
Plinth:	15mm thick MFC, 2.7m long
End Panels:	16mm thick PVC Edged Chipboard
Curved Trim:	PVC Wrapped MDF, 42mm high
Curved Plinth:	PVC Wrapped MDF, 150mm high
Caring for your kitchen:	Please follow the After Care guidelines provided separately.

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



# Luna

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



## Range and Frontal Specification

Range Name:	Modella Marble
Style:	Slab
Door Specification:	18mm MFC on a chipboard core. Matching 1.3mm ABS edged all-round.
Reverse:	Colour Matched Melamine
Glazed Frontals:	Not available

## Plinth, Trim and Panel Specification

Cornice/Pelmet:	Not available
Plinth:	Not available
End Panels:	18mm thick MFC /vertical grain
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
--------------------------	--

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



FM535144



# Modella Marble

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



## Range and Frontal Specification

Range Name:	Nordic Oak
Style:	oak veneer slab frontal
Door Specification:	18mm chipboard core with 0.5mm oak veneer. Matching 1.5mm oak veneer edging.
Reverse:	Matching 0.5mm oak veneer
Glazed Frontals:	Not available

## Plinth, Trim and Panel Specification

Cornice/Pelmet:	Oak veneer wrapped MDF 42mm high, 2.7m long
Plinth:	16mm thick oak veneer wrapped chipboard, 2.7m long
End Panels:	16mm thick oak veneer chipboard with 1.5mm oak veneer edge
Curved Trim:	Not Available
Curved Plinth:	Not Available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
--------------------------	--

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



FM535144



# Nordic Oak

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack


Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design

## Nordic Oak Wave

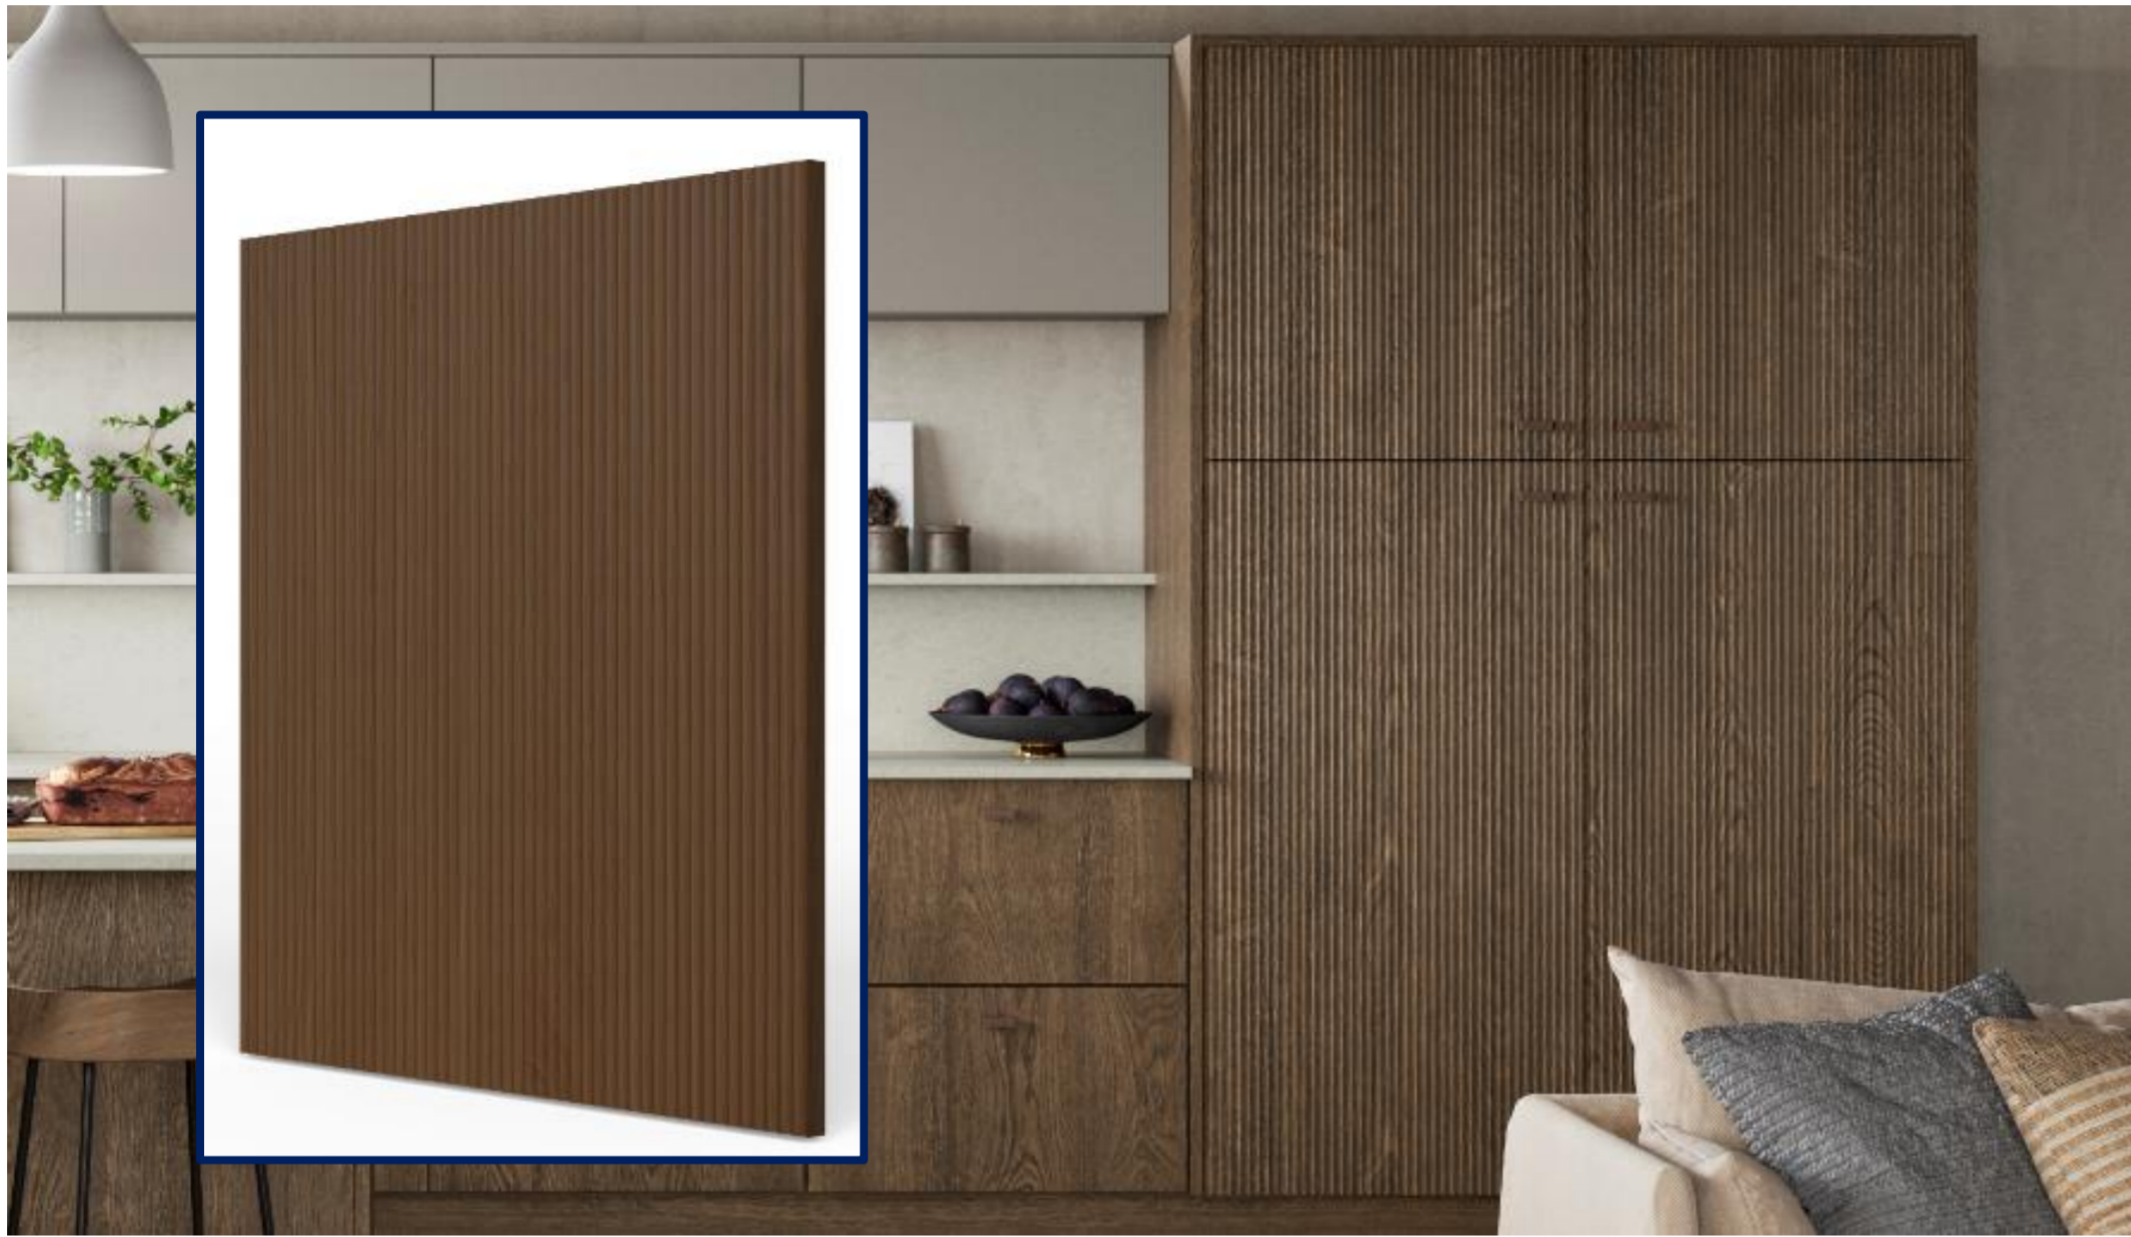

Range and Frontal Specification	
Range Name:	Nordic Oak Wave
Style:	fluted oak veneer frontal
Door Specification:	18mm chipboard core with 0.3mm oak veneer. Matching 0.6mm oak veneer edging.
Reverse:	Matching 0.3mm oak veneer
Glazed Frontals:	Not available

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Not available
Plinth:	25mm Ribbed plinth, 147mm high 16mm black painted MDF with oak stained timber inserts
End Panels:	Not available
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



Available in:

Gloss  
Cashmere

Gloss Grey

Gloss  
White

Super Matt  
Slate

Super Matt  
Grey

Super Matt  
Seagrass

## Range and Frontal Specification

Range Name:	Nova
Style:	Slab
Door Specification:	16mm PET foil on flat laminated chipboard with matching 0.5mm ABS edge all round
Reverse:	Balancing colour matched reverse foil
Glazed Frontals:	Not available

## Plinth, Trim and Panel Specification

Cornice/Pelmet:	Foil Wrapped MDF 2.7m long
Plinth:	16mm thick MFC, 2.7m long
End Panels:	Gloss White & Cream: 16mm thick PVC Edged Chipboard, White Melamine reverse Cashmere & Matt finishes: 16mm thick PVC Edged Chipboard, colour matched reverse
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
--------------------------	--

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



FM535144



# Nova

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



### Range and Frontal Specification

Range Name:	Soho
Style:	Painted Slab
Door Specification:	18.5mm Painted MDF
Reverse:	Colour Matched Melamine
Glazed Frontals:	Clear, toughened, 4mm thick, PVC beading 1052 x 496 - 10 panes, 896 x 496 - 8 panes, 700 x 496 - 6 panes

### Plinth, Trim and Panel Specification

Cornice/Pelmet:	Foil Wrapped MDF Painted, 2.7m long
Plinth:	16mm painted MDF, 2.7m long
End Panels:	18.5mm thick Painted MDF, Smooth
Curved Trim:	Foil Wrapped Painted. For use with WEC35
Curved Plinth:	Foil Wrapped Painted. For use with FEC35

As a premium painted product it is vitally important that you follow the simple After Care instructions provided separately to ensure longevity and enjoyment of your kitchen

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



FM535144



# Soho

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack


Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design

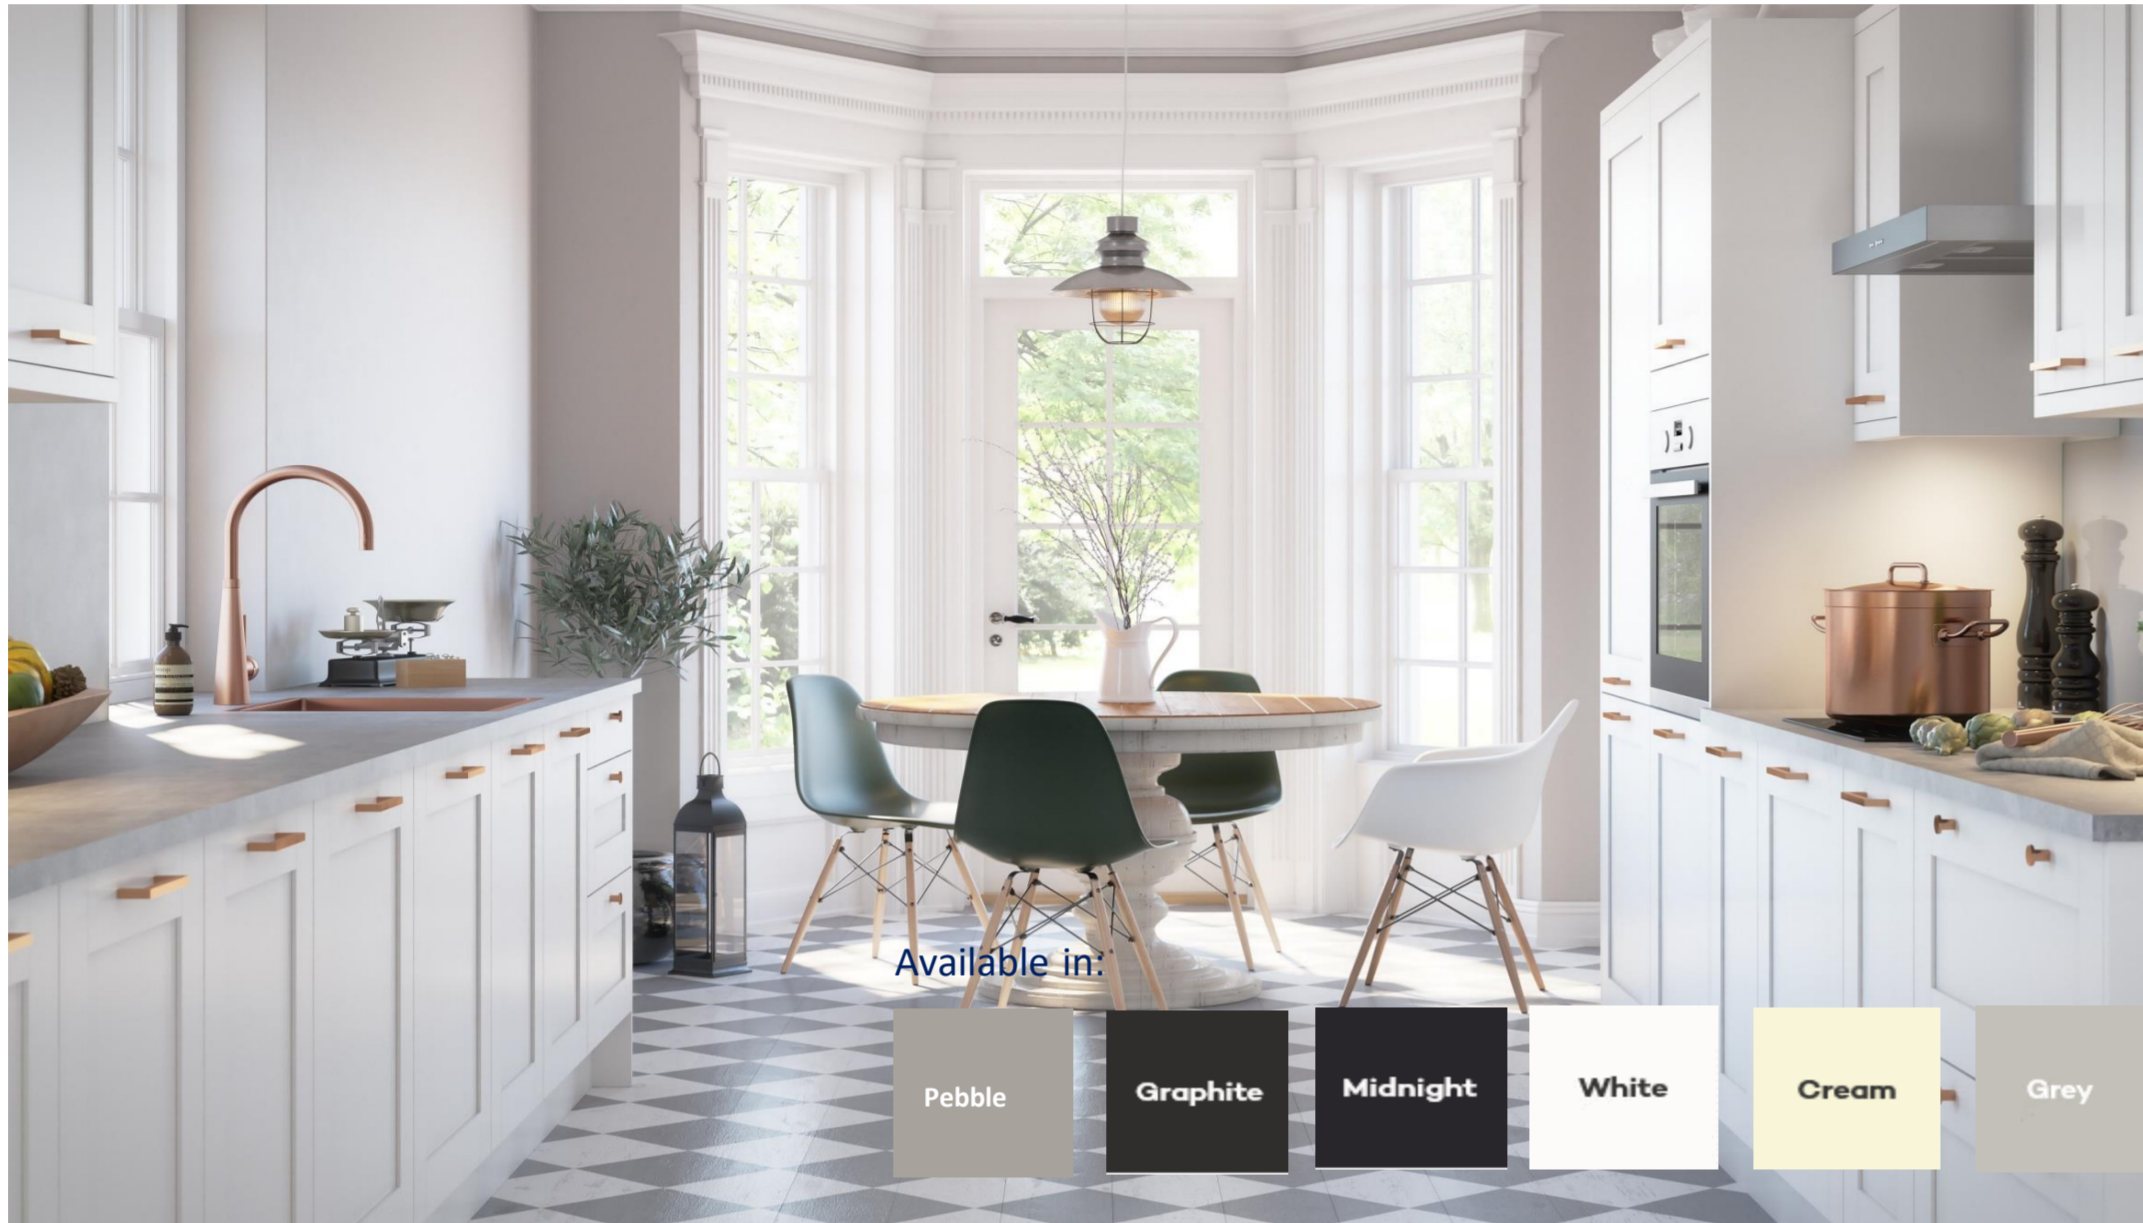

### Range and Frontal Specification

Range Name:	Tatton
Style:	Shaker
Door Specification:	Five piece Shaker style frontal, 18mm Foil wrapped chipboard frames and 6mm MDF flat laminated centre panels. Matching ABS end caps.
Reverse:	White Melamine
Glazed Frontals:	Clear, toughened, 4mm thick

### Plinth, Trim and Panel Specification

Cornice/Pelmet:	PVC Wrapped MDF 2.7m long
Plinth:	15mm thick MFC, 2.7m long
End Panels:	15mm thick MFC
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



FM535144



# Tatton

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design



Range and Frontal Specification	
Range Name:	Tribeca
Style:	In-Frame Effect Shaker Door
Door Specification:	19mm one piece pressed PVC Shaker style with In-Frame detail on MDF core and white melamine reverse.
Reverse:	White Melamine Reverse
Glazed Frontals:	4mm Toughened Clear Glass Secured With Plastic Bead

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	PVC wrapped MDF, 2.7m long
Plinth:	16mm thick PVC wrapped MDF, 2.7m long
End Panels:	18mm Partial PVC wrapped MDF
Curved Trim:	PVC Pressed MDF For use with WEC35
Curved Plinth:	PVC Pressed MDF For use with FEC35

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



# Tribeca

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

Magnet

Better. By design

Trieste



Range and Frontal Specification	
Range Name:	Trieste
Style:	Slab
Door Specification:	15mm Melamine faced chipboard slab style with matching reverse and 1.3mm thick ABS edging all round
Reverse:	Colour Matched Melamine
Glazed Frontals:	Not available

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Foil Wrapped MDF 42mm high, 2.7m long
Plinth:	15mm thick MFC, 2.7m long
End Panels:	15mm thick MFC
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
--------------------------	--

Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005
----------------	--



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

Magnet

Better. By design

Vitrine Black Smoked



Range and Frontal Specification	
Range Name:	Vitrine Black Smoked
Style:	Aluminium Framed Glass Door
Door Specification:	Aluminium Framed Glass Door
Reverse:	Not available
Glazed Frontals:	4mm clear tempered glass with anodised frame

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Not available
Plinth:	Not available
End Panels:	Not available
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



FM535144



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

Magnet

Better. By design



Range and Frontal Specification	
Range Name:	Vitrine Black Wave
Style:	Aluminium Fluted Glass Door
Door Specification:	Aluminium Fluted Glass Door
Reverse:	Not available
Glazed Frontals:	5mm tempered glass with 11mm wide flutes and anodised black frame

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Not available
Plinth:	Not available
End Panels:	Not available
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



FM535144



## Vitrine Black Wave

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high


Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Vitrine Stainless Steel Clear

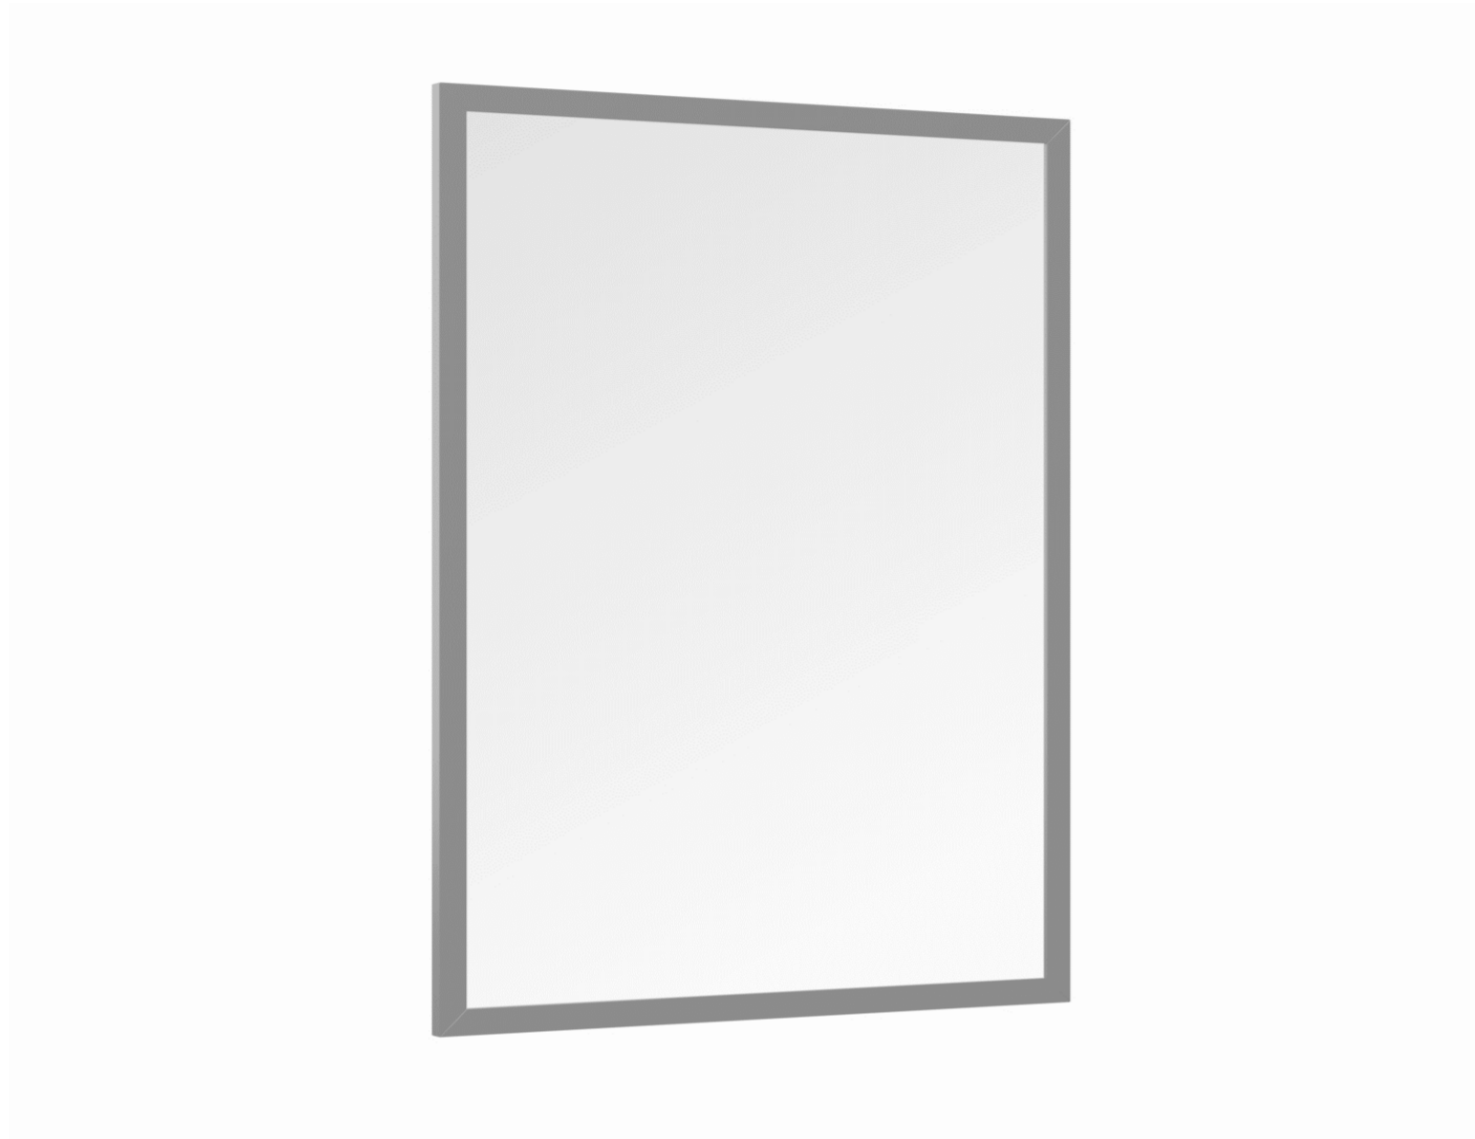

Range and Frontal Specification	
Range Name:	Vitrine Stainless Steel Clear
Style:	Aluminium Framed Glass Door
Door Specification:	Aluminium Framed Glass Door
Reverse:	Not available
Glazed Frontals:	4mm clear tempered glass with aluminium frame

Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Not available
Plinth:	Not available
End Panels:	Not available
Curved Trim:	Not available
Curved Plinth:	Not available

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves

Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high

Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack


Rigid iD³ Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD³
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack

Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.

# Magnet

Better. By design

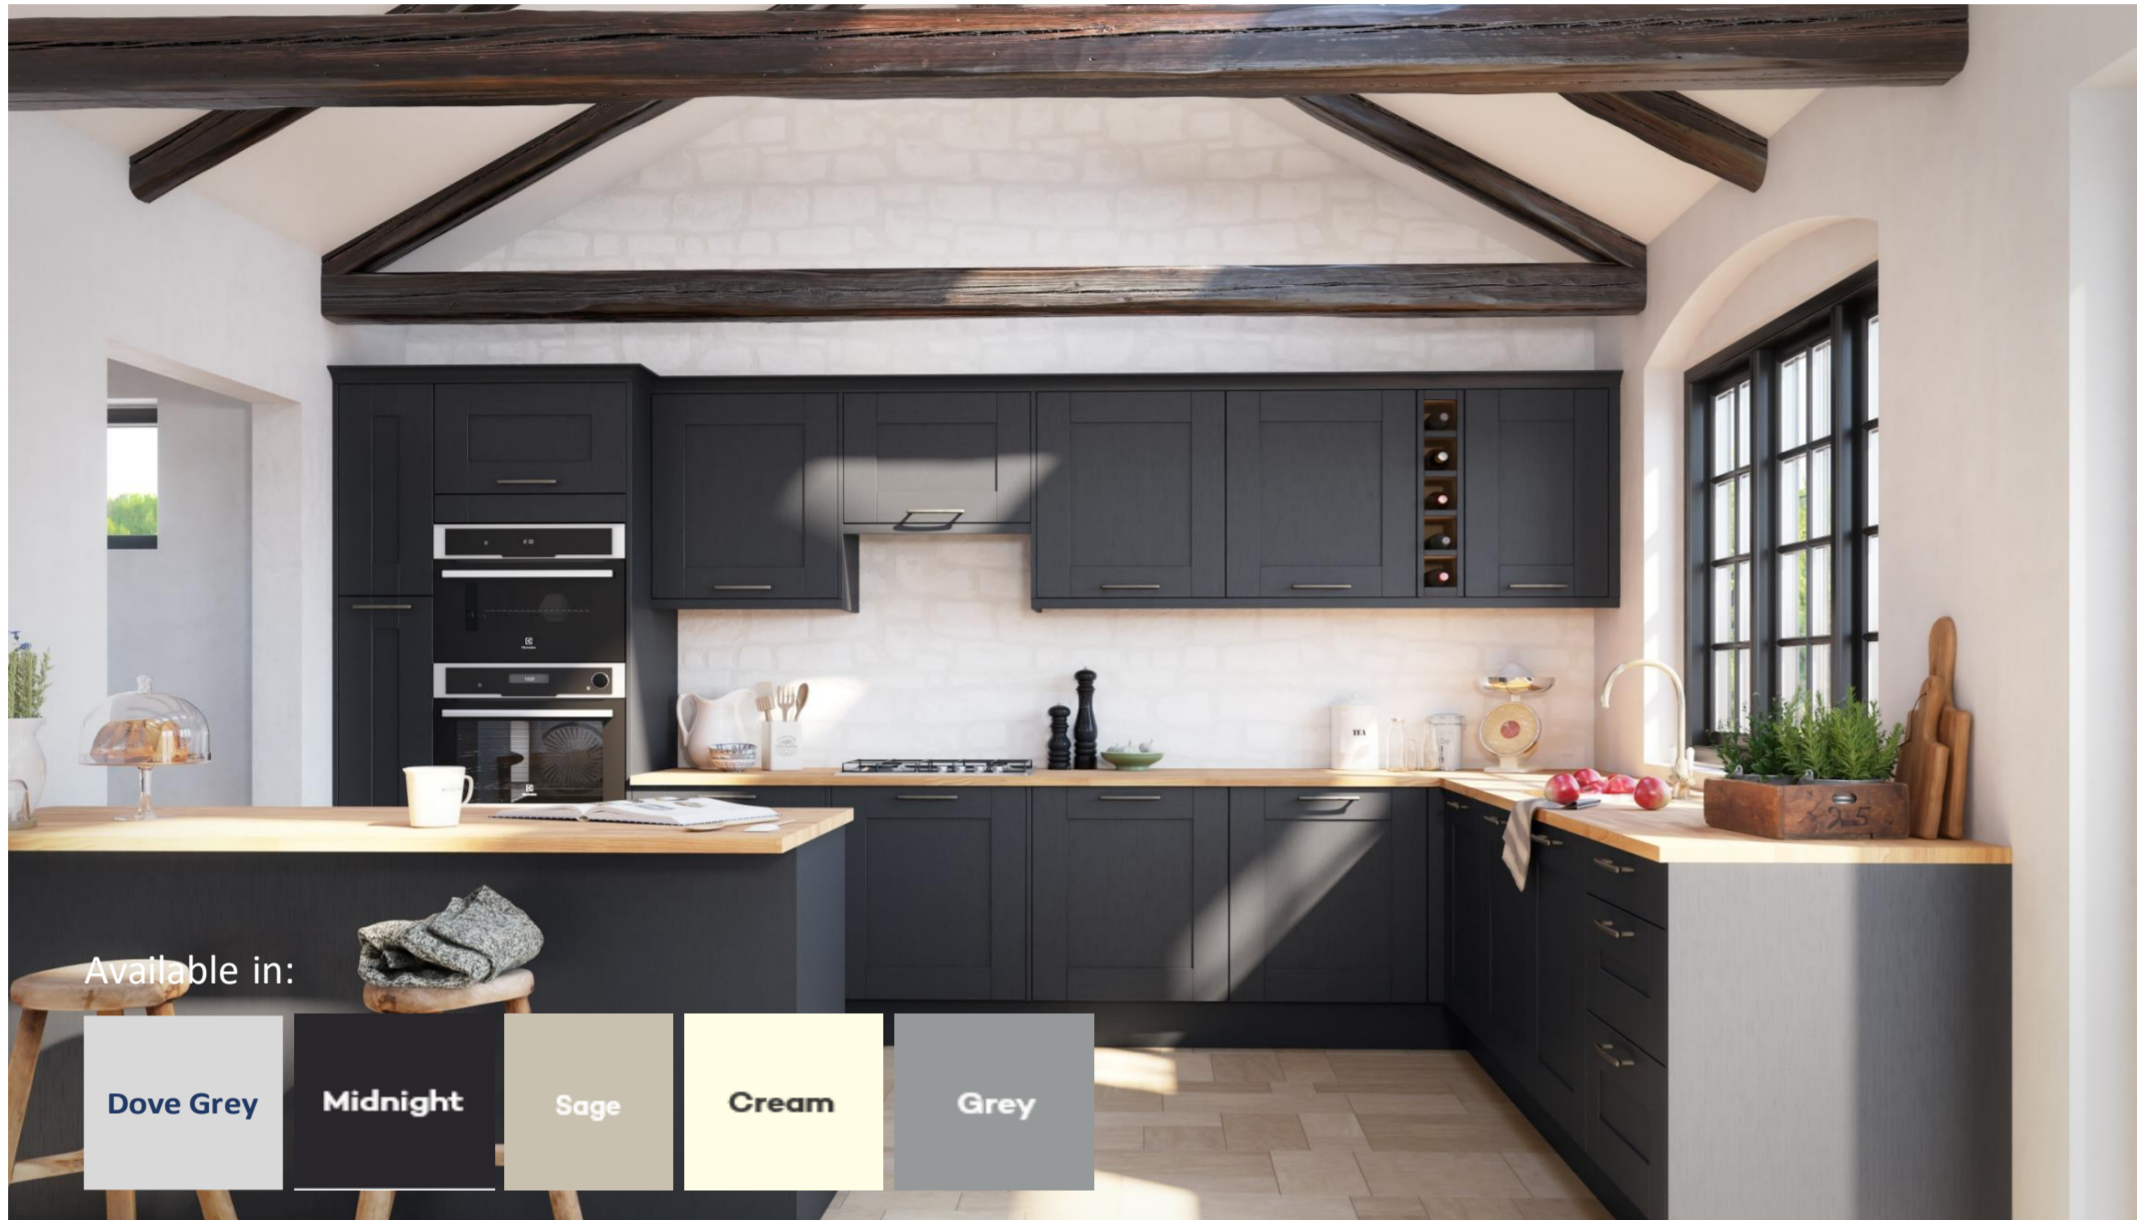

Range and Frontal Specification	
Range Name:	Winchester
Style:	Timber Effect Shaker
Door Specification:	Five piece Shaker frontal style with woodgrain structure, 19mm Foil wrapped MDF frames and 6mm MDF flat laminated centre panels. Matching ABS end caps.
Reverse:	Colour & Texture Matched Reversed
Glazed Frontals:	Clear, toughened, PVC beading
Plinth, Trim and Panel Specification	
Cornice/Pelmet:	Foil Wrapped MDF, 2.7m long
Plinth:	16mm Timber Effect MFC, 2.7m long
End Panels:	18mm thick Foil Wrapped MDF
Curved Trim:	Foil Wrapped MDF For use with WEC35
Curved Plinth:	Foil Wrapped For use with FEC35

Caring for your kitchen:	Please follow the After Care guidelines provided separately.
Certification:	Rigid factory assembled carcasses are certified to BS6222 pt 2 level 'H' Ready to assemble carcasses have been tested by FIRA to BS EN 14749:2005



# Winchester

Wall Unit Specification:	
Unit Depth:	330mm (excluding frontal)
Internal Depth:	309mm
Height:	704 (Standard), 896mm (Tall)
Shelf Qty:	2 Shelves
Floor/Tall Unit Specification:	
Unit Depth:	565mm (excluding frontal)
Internal Depth:	505mm
Service Void:	57mm
Base Unit Height to Worktop:	870mm
Tall Unit Height:	2118mm (Standard) 2310 (Tall)
Legs:	Adjustable legs supplied with all base/tall units
Plinth:	Continuous 'clip-on' plinth, 166mm high
Rigid Factory Assembled	
Carcase Options:	White 18mm thick chipboard cabinet, 18mm thick shelf with silver ABS front edge Oak 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Regular - 500 deep, metal sided drawer box, smooth metal roller runner, 15mm MFC base Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	3mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack
Rigid iD <sup>3</sup> Cabinet	
Carcase Options:	Grey 18mm thick chipboard cabinet, 18mm thick shelf
Hinge Options:	Blum integrated 110 Degree soft close - on selected units, when purchasing the iD <sup>3</sup>
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion soft close system, 15mm MFC base
Back Panel:	6mm High Density Fibre Board (HDF)
Flatpack Units:	For transport reasons, the L-shaped corner unit is supplied flatpack
Ready to Assemble	
Carcase Options:	White 16mm thick chipboard cabinet, 16mm thick shelf All cabinets are delivered ready to assemble. Cam and dowel construction
Hinge Options:	Blum 110 Degree Soft Close as Standard - Standard Units Blum 170 Degree Soft Close as standard - Corner Wall /Base
Drawerbox Options:	Smooth Close - 500mm deep silver/grey painted Blum Tandembox drawer with Blumotion
Back Panel:	2.5mm High Density Fibre Board (HDF)

All door and drawer fronts are supplied separately for maximum protection during transit and installation.